

Panasonic

Laser Welding System VL-W1 series

PLASTIC WELDING



CE

FDA
Conforming to
FDA regulations

Smart and effortless plastic welding

We are introducing a new plastic welding system with a galvano scanner which neither requires a robot or X-Y stage for moving the laser source, the optical part, and the laser emitting unit nor a control system to coordinate the three parts.

The VL-W1 series incorporates all necessary components. Our all-in-one system reduces the resources for installing and operating a complex system.

The VL-W1 series proves that using a laser plastic welding system can be smart and effortlessly.




Galvano scanning system	04
Fiber laser VL-W1.	05
Quality assurance function.	06
Software	07
Technical innovations.	08
Processing information	09
Dimensions.	10
Specifications / Support.	11

Applications of the laser welding system VL-W1



Electrical sensors

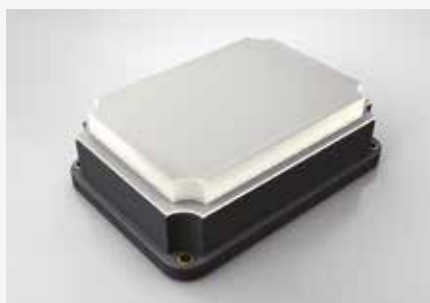

Electronic control unit




Waterproofed display device

Equipped with galvano scanner


The VL-W1 offers compact dimensions. Furthermore, the galvano scanning system uses the galvano mirror built in the laser head to scan the laser, thus eliminating the need to

move the head. It does not require a robot or X-Y stage and therefore reduces the need for resources when designing a complex system.

Conventional laser plastic welding system


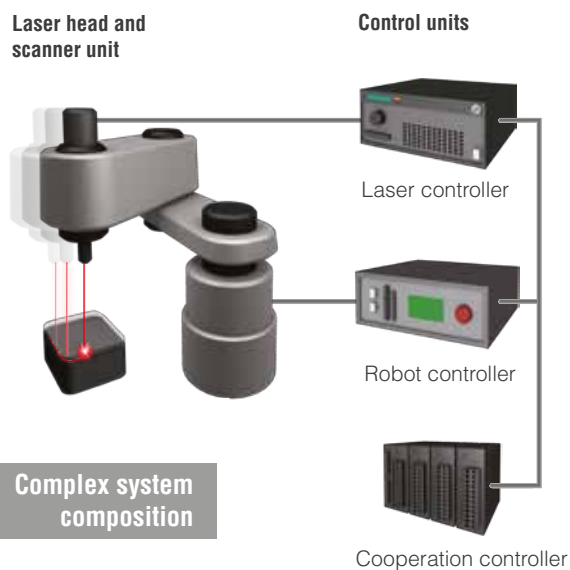


Galvano scanning laser plastic welding system

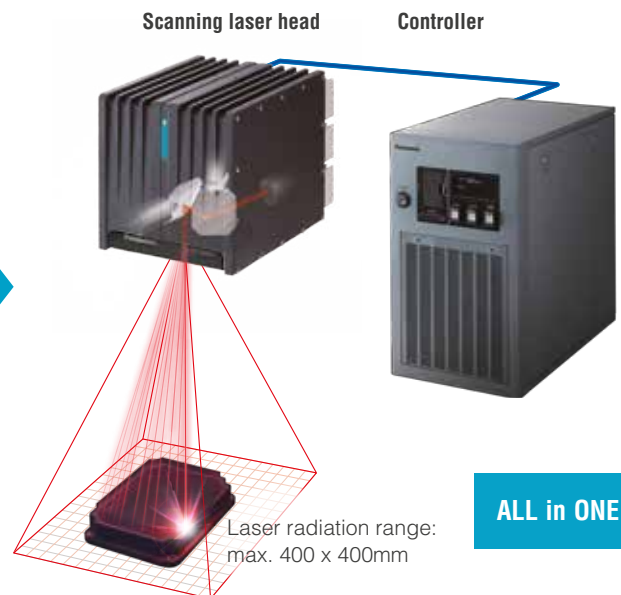


Power correction for curved sections

With normal laser output, the heat tends to accumulate more at curved sections than at straight sections. This may lead to uneven welding results. The VL-W1 series optimizes the laser output at curved sections to achieve a uniform welding result even at complex welding patterns.

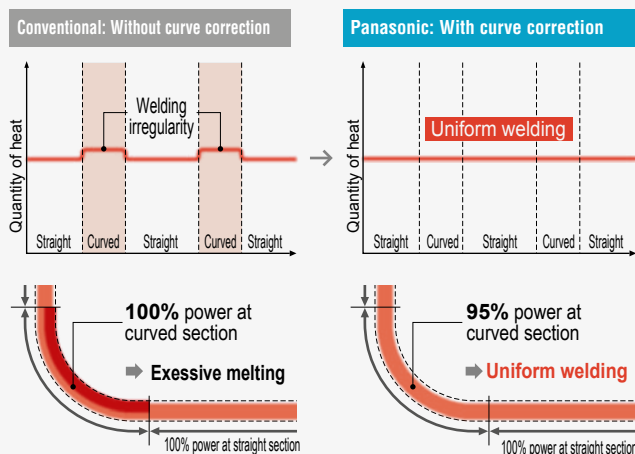

Digital galvano system

The digital galvano system boasts significantly better temperature characteristics than the analog systems. A change in the surrounding temperature does not lead to deviations of the beam position as with analog galvano systems. This way, a stable production quality is ensured.

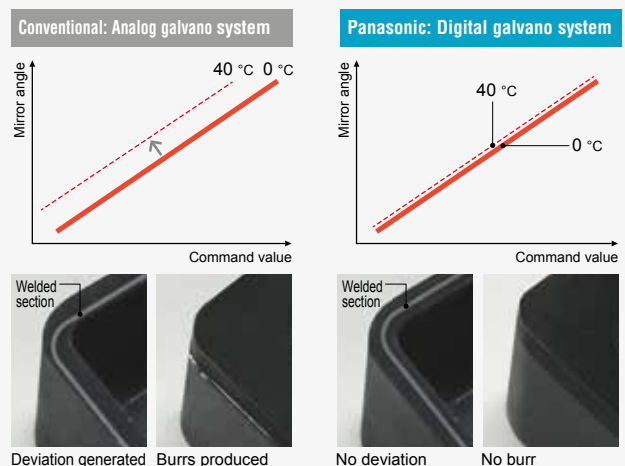

High-quality welding

The VL-W1 series is equipped with our original, high-performance fiber laser developed based on the technologies we


have accumulated through the manufacture of laser marking systems. This fiber laser achieves high-quality welding results.

Laser quality $M^2 < 1.1$

The VL-W1 series has achieved $M^2 < 1.1$ using original fiber laser technology. M^2 is a numeric value which indicates the quality of the laser beam. The closer this value is to 1.0, the higher the quality of the laser beam.


Laser output stability within $\pm 3\%$

The fiber laser emits a beam with stable output regardless of the temperature fluctuation of the laser diodes. The laser output stays stable immediately after power ON until production operation halt. Thus, a high production quality is ensured.

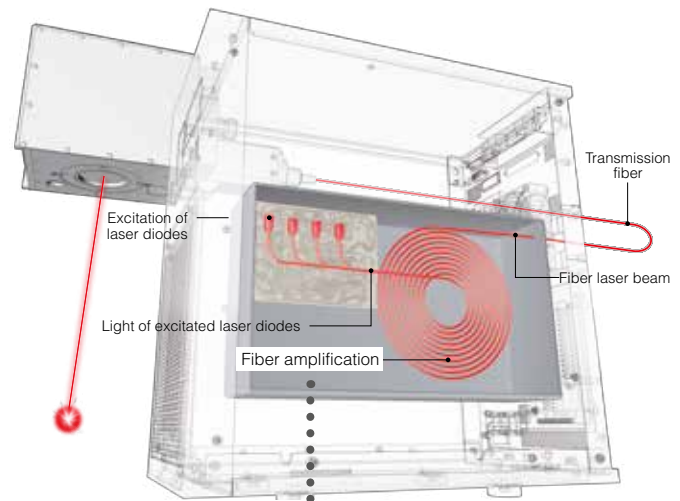


Fiber laser oscillation principle

The fiber laser is a type of solid-state laser that uses an optical fiber as an amplification medium. Since light can be amplified inside an extremely thin fiber core, a laser light with a high beam quality can be obtained.

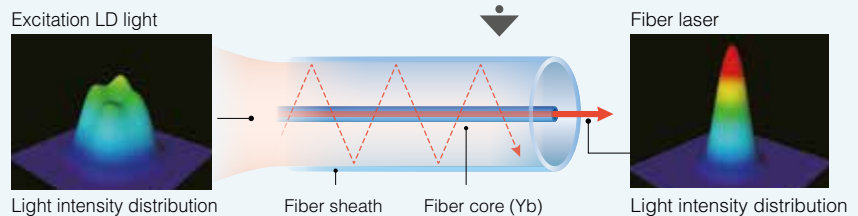

Parallel light



The combination of the high-quality $M^2 < 1.1$ beam and our proven optical design has realized a parallel light beam with minimal beam widening. This allows working on different planes and enables a precise laser beam emission even very close to the edge of parts.

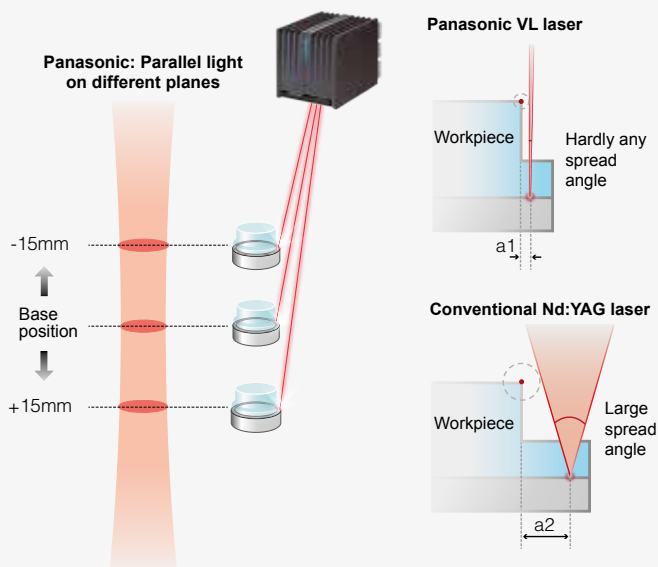

Variable beam diameter

The variable beam diameter mechanism enables the adjustment of the beam diameter between 0.7 and 2.0mm. Therefore the desired welding width can be set without replacing the optical parts.

Different beam diameters

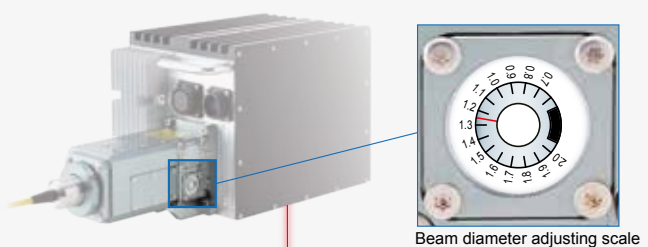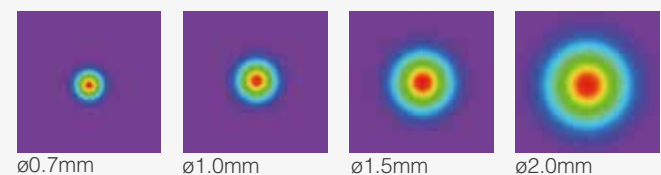

Laser output power monitoring

The VL-W1 series features a high-performance monitor in its head. It monitors the laser output power accurately at real


High-speed sampling: 10ms

The laser output power can be captured and read out in 10ms intervals immediately after the emission starts.

time during welding. This is extremely useful for recording and managing the laser output power.

Measurement precision: $\pm 2\%$

Our high-performance components ensure a high measurement precision of $\pm 2\%$.

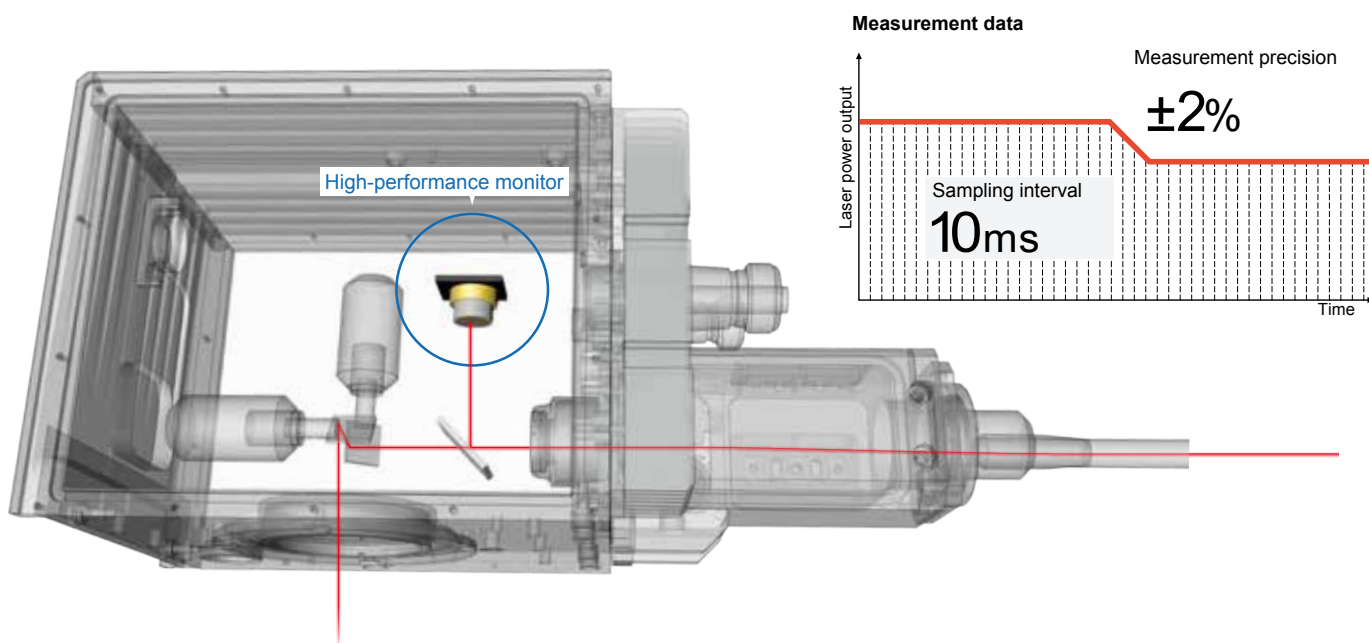

Real-time power meter

The data measured by the high-performance power meter can be output in real time in three different ways. This function is useful for production and quality management.

Voltage output

1 to 5 V

Current output

4 to 20 mA

Serial output


Ethernet

Example of system configuration



Quality management with measurement results

This functionality sends a notification to an external device when the laser power exceeds the preset upper or lower limit during emission. It supports you in adhering to the required quality standards.

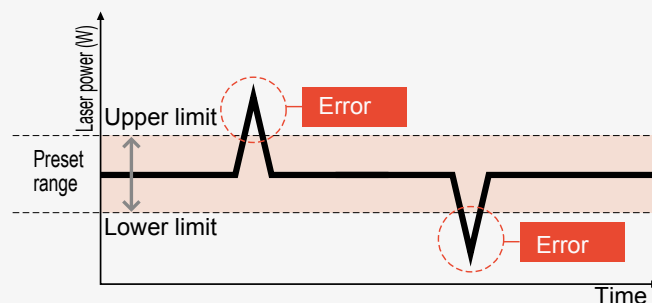

Easy operation

The operation with the color touch panel (optional) is easy to use. The LC display allows an intuitive operation.


Step 1: Draw welding seam

You can draw a workpiece's contour easily on the special screen. Patterns such as "Line," "Circle," "Arc" or "Rectangle" can also be combined.




Step 2: Check position

The laser position can be checked with the red pointer. This function ensures accurate positioning.



Step 3: Set parameters


There are three basic parameters to be set: "Laser power," "Scan speed" and "Scanning frequency." With "Detail," you can make fine adjustments.



Smart settings at your fingertip!


CAD data import function

Complex patterns can be produced with CAD software and imported to the VL-W1. If you need a quick response to a change in design this is the right answer.

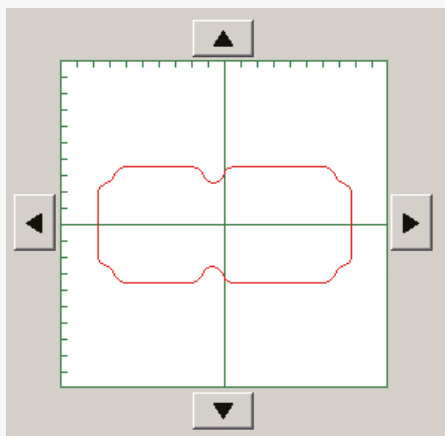

Spiral function

The spiral width can be flexibly changed in the longitudinal or transverse direction. An appropriate pattern can be easily set according to the workpiece and the required laser energy. Even thick welding seams are no problem with the spiral function.

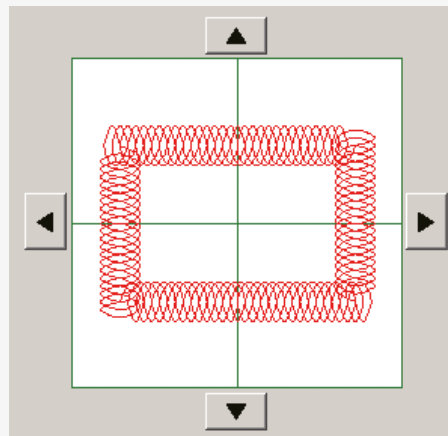


Enhanced safety functions

ISO 11553-1 compliance

A shutter blocks the laser beam and an interlock terminal shuts off the power supply of the laser oscillator. Both are implemented as separate interfaces to configure a double safe system.

Removable fiber unit

The fiber unit can be detached and removed from the laser head. This allows easy installation of the equipment and facilitates the maintenance.

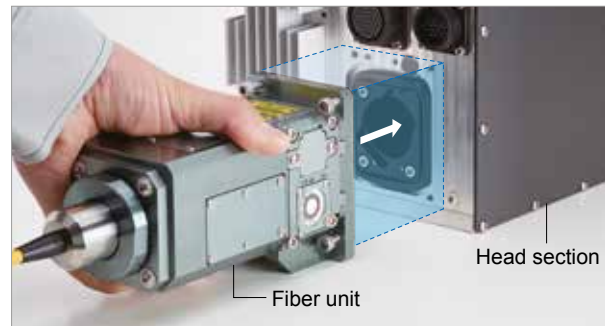

Comfortable maintenance functions

Error log display

The error log data can also be saved.

I/O monitor function


You can check the I/O states during the welding process in real time.



Convenient onsite adjustment


Adjustment of overlapping start and end points

This function adjusts the overlap amount at the start and end points of the laser beam.

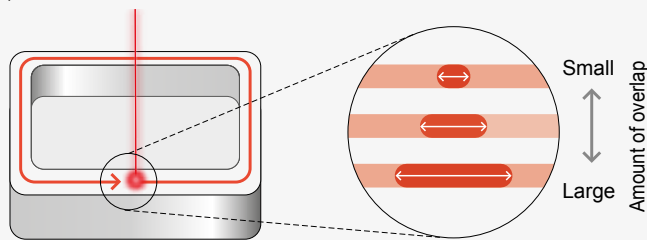


Adjustment of distance between workpieces

The distance between workpieces can be adjusted using the software. This is especially useful when welding parts with different heights use the same welding pattern.




Sequence editing

If part sections warp or show sink marks, the welding sequence can be changed.

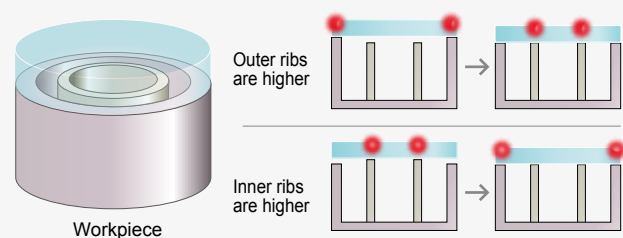

Guide laser


The red visible beam of the guide laser helps to confirm the welding position in different ways.

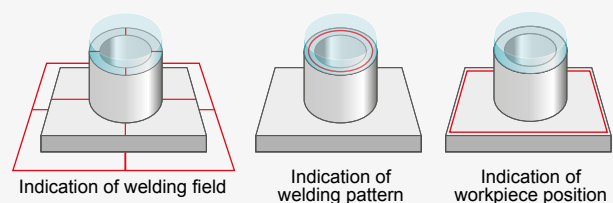

Laser plastic welding principle

Laser welding joins plastic pieces by emitting laser radiation and generating heat at the boundary surface without using any adhesive. The laser beam must pass through the laser

transparent (upper) material, and then will be absorbed by the laser absorbing (lower) material.

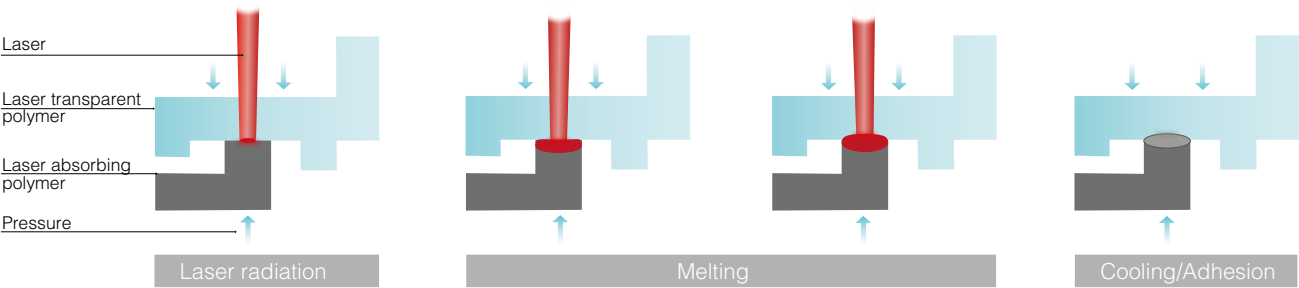

Laser welding in Panasonic products

Laser welding machines achieve excellent seals and produce no powder dust and minimal burrs. Our company uses

the laser welding equipment in its own product manufacturing processes. Some examples are shown below.

Panasonic: Ultra-slim light curtain SF4C series

Welded part	Large front panel
Plastic materials	PC
Benefits	Slimmer product dimension, cost reduction



Panasonic: Digital fiber sensor FX-500 series

Welded part	Infrared communication window
Plastic materials	PC
Benefits	Improvement of dust and water-proofness



Compatible plastic materials

	ABS	ASA	MABS	PA6	PA66	PA12	PBT	PBT/ASA	PC	PC/ABS	PE-LD	PE-HD	PEEK	PES	PET	PMMA	POM	PP	PPS	PS	PSU	PVC	SAN
ABS	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
ASA	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
MABS	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
PA6	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
PA66	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
PA12	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
PBT	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
PBT/ASA	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
PC	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
PC/ABS	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
PE-LD	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong
PE-HD	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong	Strong
PEEK	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
PES	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
PET	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
PMMA	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
POM	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
PP	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
PPS	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
PS	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
PSU	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
PVC	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak
SAN	Strong	Strong	Strong	Weak	Weak	Weak	Strong	Strong	Strong	Strong	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak	Weak

Note: Natural material on beam transparent side; black-colored (carbon black) material on laser absorbing side.

Plastic materials that can be laser-welded are primarily thermoplastic materials. Even if the materials are divided in laser transmitting and laser absorbing materials, both can be welded, provided the laser transparent side has a laser transmittance of at least 15% to 20%. The material on


the laser transparent side does not necessarily have to be translucent.

If you have any questions regarding the compatibility of materials, please consult our company.


[Unit: mm]

*The CAD data can be downloaded from our website.

Head

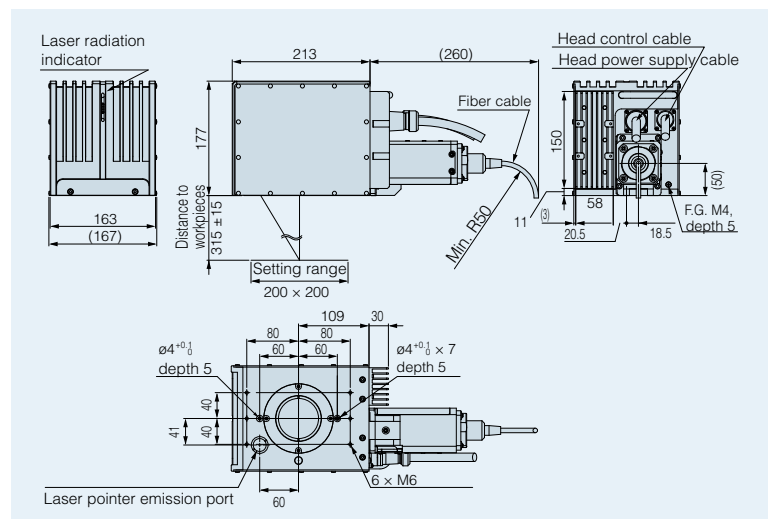


Touchpanel LP-ADP40 (sold separately)

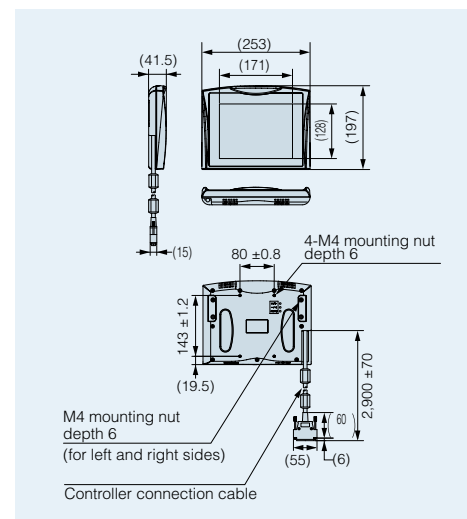


Controller

VL-W1500 / VL-W11506

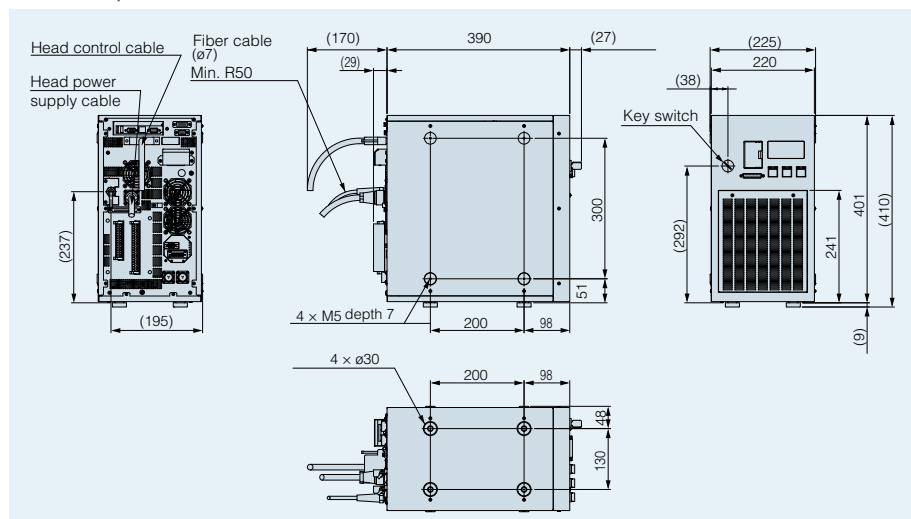

VL-W1A00 / VL-W1A06

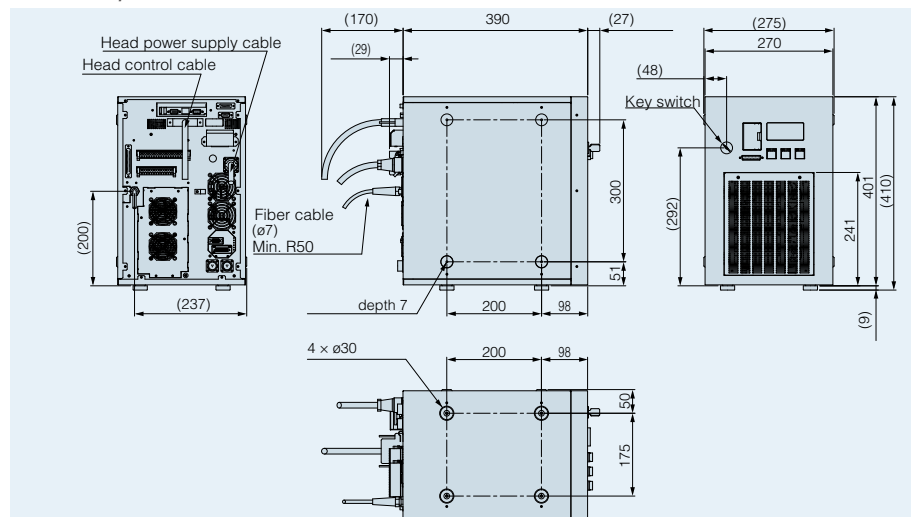

Specifications

Model No.		VL-W1500	VL-W1A00	VL-W1506	VL-W1A06
Item		50W	100W	50W	100W
Laser output power		Yb fiber laser; λ = 1070nm, class 4, CW oscillation			
Output power at workpiece		45W ±5%	90W ±5%	45W ±5%	90W ±5%
Guide laser, pointer		Red semiconductor laser; λ= 655nm; class 2 laser: Maximum output 1mW or less			
Scanner		Digital galvano scanner			
Setting range (X, Y)		200 × 200mm		400 × 400mm	
Working distance (base position ± preset range)		315 ±15mm		685 ±15mm	
Scan speed		Maximum 3000mm/s			
Registration files		2048 files			
Importable graphic data (file format)		VEC, DXF, HPGL, BMP, JPEG			
Welding geometry		Straight line, circle, arc, quadrilateral, fixed point			
External memory device		USB media			
I/O ports		I/O terminal block, I/O connector, interlock connector, power data output (RS232C)/shutter closing output terminal			
Serial communication interface		RS232C (for system control, for power data), Ethernet (for system control)			
Cooling method		Head: air cooling, controller: forced air cooling			
Power supply		90–132V AC or 180–264V AC, 50/60Hz (automatic switching)			
Power consumption		max. 580VA (at 100V AC), max. 720VA (at 200V AC)	max. 740VA (at 100V AC), max. 830VA (at 200V AC)	max. 580VA (at 100V AC), max. 720VA (at 200V AC)	max. 740VA (at 100V AC), max. 830VA (at 200V AC)
Ambient temperature		0 to +40°C (head, controller)			
Storage temperature		-10 to +60°C (head, controller)			
Ambient humidity		35 to 85% RH (head, controller)			
Degree of protection		IP54 (IEC) (only for connected head section)			
Supplied cable		▶ Controller power supply cable: 3 ±0.1m, ø7mm for CE standard, ø9mm for PSE/CSA/UL standards ▶ Head power supply cable: 5.5 ±0.1m, ø11mm ▶ Head control cable: 5.5 ±0.1m, ø12mm			
Fiber cable		5 ±0.2m, ø7mm, minimum bend radius: 50mm			
Net weight	Head	≈ 12kg			
	Controller	≈ 28kg	≈ 35kg	≈ 28kg	≈ 35kg
Main unit display language		Japanese/English			
Supplied software		Laser Processing Utility_VL-W1 (logo data conversion software, logo data editing software)			
Supported OS		Microsoft® Windows® 7 Professional (32bit/64bit) (Japanese/English/Simplified Chinese)			

Reliable support in all stages

Panasonic conducts preliminary tests with the customer's application and offers support in developing clamping units. We provide extensive support to ensure safe and reliable laser welding from the developing stage to the serial production.

Preliminary test

Verification of laser welding results using test pieces

Installation and operation

Support until first start-up of operation


Production test

Laser welding test during current production


Test piece




Tensile test



Airtightness test



Test equipment





North America

Europe

Asia Pacific

China

Japan

Panasonic Electric Works

Please contact our Global Sales Companies in:

Europe		
► Headquarters	Panasonic Electric Works Europe AG	Robert-Koch-Straße 100, 85521 Ottobrunn, Tel. +49 89 45354-1000, Fax +49 89 45354-2111, www.panasonic-electric-works.com
► Austria	Panasonic Electric Works Austria GmbH	Josef Madersperger Str. 2, 2362 Biedermannsdorf, Tel. +43 (0) 2236-26846, Fax +43 (0) 2236-46133 www.panasonic-electric-works.at
	Panasonic Industrial Devices Materials Europe GmbH	Ennshafenstraße 30, 4470 Enns, Tel. +43 (0) 7223 883, Fax +43 (0) 7223 88333, www.panasonic-electronic-materials.com
► Benelux	Panasonic Electric Works Sales Western Europe B.V.	De Rijn 4, (Postbus 211), 5684 PJ Best, (5680 AE Best), Netherlands, Tel. +31 (0) 499 372727, Fax +31 (0) 499 372185, www.panasonic-electric-works.nl
► Czech Republic	Panasonic Electric Works Europe AG, organizační složka	Administrative centre PLATINIUM, Veverí 3163/111, 616 00 Brno, Tel. +420 541 217 001, Fax +420 541 217 101, www.panasonic-electric-works.cz
► France	Panasonic Electric Works Sales Western Europe B.V.	Succursale française, 10, rue des petits ruisseaux, 91370 Verrières Le Buisson, Tél. +33 (0) 1 6013 5757, Fax +33 (0) 1 6013 5758, www.panasonic-electric-works.fr
► Germany	Panasonic Electric Works Europe AG	Robert-Koch-Straße 100, 85521 Ottobrunn, Tel. +49 89 45354-1000, Fax +49 89 45354-2111, www.panasonic-electric-works.de
► Hungary	Panasonic Electric Works Europe AG	Magyarországi Közvetlen Kereskedelmi Képviselet, 1117 Budapest, Neumann János u. 1., Tel. +43 2236 26846-25, Mobile: +36 20 264 9896, Fax +43 2236 46133, www.panasonic-electric-works.hu
► Ireland	Panasonic Electric Works UK Ltd.	Irish Branch Office, Dublin, Tel. +353 (0) 14600969, Fax +353 (0) 14601131, www.panasonic-electric-works.co.uk
► Italy	Panasonic Electric Works Italia srl	Via del Commercio 3-5 (Z.I. Ferlina), 37012 Bussolengo (VR), Tel. +39 0456752711, Fax +39 0456700444, www.panasonic-electric-works.it
► Nordic Countries	Panasonic Electric Works Europe AG Panasonic Eco Solutions Nordic AB	Filial Nordic, Knarrarnäsgatan 15, 164 40 Kista, Sweden, Tel. +46 859476680, Fax +46 859476690, www.panasonic-electric-works.se
► Poland	Panasonic Electric Works Polska sp. z o.o	Jungmansgatan 12, 21119 Malmö, Tel. +46 40 697 7000, Fax +46 40 697 7099, www.panasonic-fire-security.com
► Spain	Panasonic Electric Works España S.A.	ul. Wotoska 9A, 02-583 Warszawa, Tel. +48 42 230 9633, www.panasonic-electric-works.pl
► Switzerland	Panasonic Electric Works Schweiz AG	Barajas Park, San Severo 20, 28042 Madrid, Tel. +34 913293875, Fax +34 913292976, www.panasonic-electric-works.es
► United Kingdom	Panasonic Electric Works UK Ltd.	Grundstrasse 8, 6343 Rotkreuz, Tel. +41 (0) 41 7997050, Fax +41 (0) 41 7997055, www.panasonic-electric-works.ch
		Sunrise Parkway, Linford Wood, Milton Keynes, MK14 6 LF, Tel. +44 (0) 1908 231555, Fax +44 (0) 1908 231599, www.panasonic-electric-works.co.uk
North & South America		
► USA	Panasonic Industrial Devices Sales Company of America	Two Riverfront Plaza, 7th Floor, Newark, NJ 07102-5490, Tel. 1-8003-442-112, www.pewa.panasonic.com
Asia Pacific/China/Japan		
► China	Panasonic Electric Works Sales (China) Co. Ltd.	Tower C 3rd Floor, Office Park, NO.5 Jinghua South Street, Chaoyang District, Beijing 100020, Tel. +86-10-5925-5988, Fax +86-10-5925-5980
► Hong Kong	Panasonic Industrial Devices Sales (HK) Co., Ltd.	Suite 301, 3/F, Chinachem Golden Plaza, 77 Mody Road, TST East, Kowloon, Hong Kong, Tel. +852-2529-3956, Fax +852-2528-6991
► Japan	Panasonic Corporation	1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501, Japan, Tel. +81-6-6908-1121, www.panasonic.net
► Singapore	Panasonic Industrial Devices Automation Controls Sales Asia Pacific	No.3 Bedok South Road, Singapore 469269, Tel. +65-6299-9181, Fax +65-6390-3953